


**Promat**



# CAFCO FENDOLITE<sup>®</sup>-MII

**Vermiculite Cement Based Wet Mix Spray**

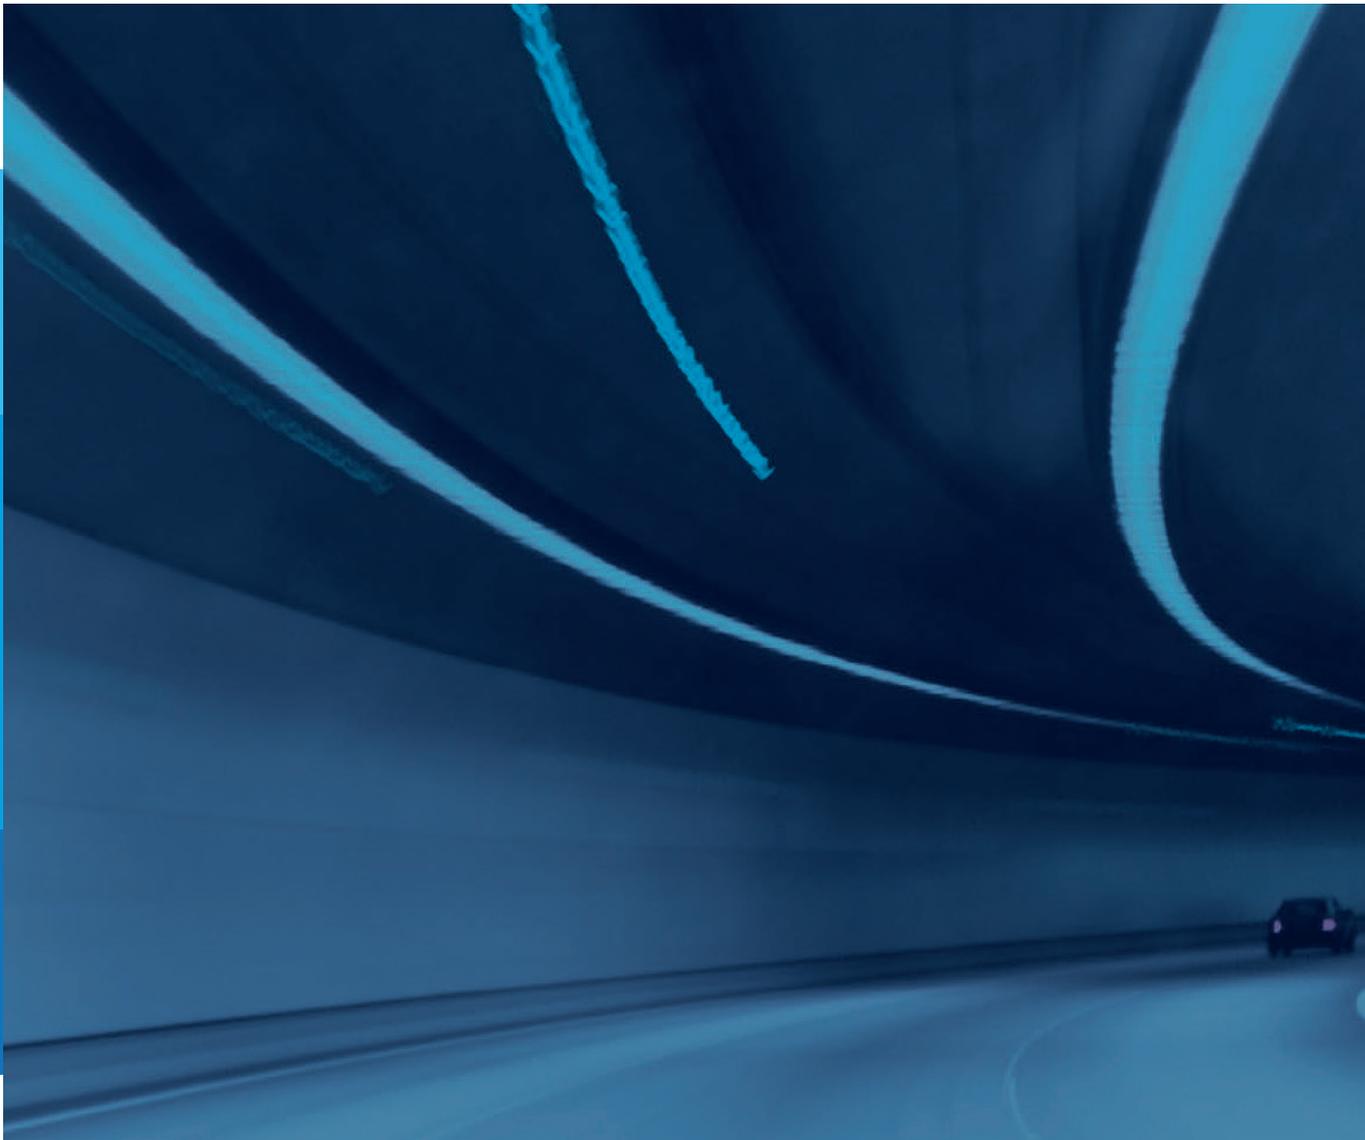

# CAFCO FENDOLITE®-MII

## Vermiculite Cement Based Wet Mix Spray

Cafco FENDOLITE®-MII is a spray applied, single package factory controlled cement based premix, based on vermiculite and Portland cement.

Cafco FENDOLITE®-MII produces a monolithic coating able to withstand the thermal shocks experienced in a high intensity hydrocarbon fire. Concrete structures in particular, will be protected from explosive spalling when coated with Cafco FENDOLITE®-MII. Although low in density, thus significantly reducing dead load, Cafco FENDOLITE® MII is highly durable and will not crack or spall under mechanical impact.

Cafco FENDOLITE®-MII is used for application on construction elements such as concrete or individual steel sections. It is also used extensively for the refurbishment or upgrading of existing tunnel structures.

### Applications

- Structures protected with Cafco FENDOLITE®-MII can provide fire resistance for up to 240 minutes.
- Does not release toxic or hazardous fumes, and presents no known health hazards either before, during or after application.
- The surface may either be spray textured, roller or float finished.

### Properties and Performances

Colour and finish	Off-white, monolithic, spray texture. May be floated or roller finished
Minimum practical thickness	8mm when unreinforced, 15mm when reinforced
Theoretical coverage	62m <sup>2</sup> /tonne at 25mm thickness
Cure	By hydraulic set
Initial set	2 to 6 hours at 20°C and 50% RH
Density (Nominal)	775kg/m <sup>3</sup> ± 15% (when dry and in place)
Combustibility	Non-combustible to BS476: Part 4
Smoke generation	Does not contribute to smoke generation
Thermal conductivity	0.19 W/mK at 20°C
Corrosion resistance	Does not promote corrosion of steel. However, a primed substrate is recommended for long term corrosion resistance, particularly when the structure is to be fully exposed to the elements. See <b>Preparation</b>
pH value	12.0 - 12.5
Sound absorption	Noise reduction coefficient (NRC) 0.35
Fire resistance	Concrete and steel structures protected with Cafco FENDOLITE®-MII have undergone extensive fire resistance tests at approved independent laboratories to recognised standards throughout the world, including: UK (BS 476: Parts 20-21: 1987 Appendix D) Australia (AS1530.4 & AS4100) International Standard ISO 834 Netherlands, RWS (Fire Test procedures for tunnels GT-98036-1a) France, Hydrocarbon Modified HCM Italy (UNI 11076) USA (ASTM E119, UL263 and UL1709 - Design No. XR719) The fire resistance test results relate solely to the constructions tested and test conditions imposed. Promat provides computer based thickness calculations to meet specific fire resistance requirements on request.

## Preparation

<b>Typical substrates</b>	Concrete and steel
<b>Substrate preparation</b>	The substrate must be clean, dry and free from visible moisture (including condensation), concrete laitance, formwork release oils, loose millscale, loose rust and any other condition preventing good adhesion. Concrete curing agents should not be used.
<b>Mesh reinforcement</b>	Most fire tests conducted have been carried out without mesh reinforcement, to demonstrate the ability of Cafco FENDOLITE®-MII to stay in place under the most severe fire conditions. However, for maximum long term in service durability, the use of lightweight mesh reinforcement is recommended for exterior work and for interior use where vibration or mechanical damage and the possibility of subsequent de-bonding exist.

## Application

<b>Initial steps</b>	Application of Cafco FENDOLITE®-MII must be carried out by an applicator recognised by Promat and applied in accordance with the installation guide available from Promat.
<b>Methods</b>	Mix Cafco FENDOLITE®-MII with potable water in a suitable mixer and apply by a spraying machine approved by Promat. Cafco FENDOLITE®-MII may also be float or roller finished or left with Cafco FENDOLITE® TG. A hand applied patching mix is available for minor repairs. Please refer to product data sheet of Cafco FENDOLITE® TG
<b>Limitations</b>	Cafco FENDOLITE®-MII may be applied when the substrate and air temperatures are at least 2°C and rising, but should not be applied if the substrate or air temperatures are less than 4°C and falling. Maximum substrate and air temperature is 50°C. Substrate temperature should be at least 2°C above dew point temperature.

## Top coating

Top coating systems may be used as protection from frequent wash down, long term chemical spills, or for improved resistance to fungal, algal and bacterial growth. Please consult Promat for guidance.

## Packaging

20kg bags.

## Storage

Off the ground and kept dry until ready for use.

## Health and safety

Maximum 12 months.

## Environmental

- Do not discharge into drains, watercourses or soil.
- Not readily biodegradable.
- Not expected to bioaccumulate.
- Not expected to be toxic to aquatic life except at high concentrations.

## Quality assurance

Promat products are manufactured to stringent quality control systems to assure that our customers receive materials made to the highest standards.

Operating to these standards means that all activities, which have a bearing upon quality, are set out in written procedures.

Systematic and thorough checks are made on all materials and their usage. Test equipment is subjected to regular checks and is referred back to national standards.

The information given in this data sheet is based on actual tests and is believed to be typical of the product. No guarantee of results is implied however, since conditions of use are beyond our control.

## Health and safety

Adequate ventilation must be provided during use. Avoid contact with the skin and eyes by using eye protection, gloves, barrier cream and a face mask.

If the product comes into contact with the skin, wash immediately with soap and water. If the eyes are affected, flush with plenty of water and seek medical attention immediately.

A safety data sheet is available from Promat upon request.

Promat activities are conducted with due regard to all statutory requirements with appropriate safeguards against exposing employees and the public to health and safety risks.

# Promat

[www.promat.com](http://www.promat.com)

## Headquarters – Belgium

**Etex Building Performance NV**  
Bormstraat 24, 2830 Tiselt  
**T** +32 15 718 100  
**F** +32 15 718 109  
**E** tunnels@promat.com

## Australia

**Promat Australia Pty Ltd**  
1 Scotland Road  
SA 5031 Mile End South  
**T** 1800 Promat (776 628)  
**F** +61 8 8352 1014  
**E** PAMPL.mail@etexgroup.com

## Austria

**Etex Building Performance GmbH**  
St.-Peter-Straße 25 / Bau 39  
4021 Linz/Austria  
**T** +43 732 6912-0  
**F** +43 732 6912 3740  
**E** info.at@etexgroup.com  
DVR-Nr.: 4011276

## Chile

**Promat Chile SA**  
Camino a Melipilla, Maipú  
10803 Santiago  
**T** +56 2 2391 2200  
**E** contacto@promat.cl

## China

**Promat Shanghai Ltd**  
No.2, Tai Hua Street,  
Yonghe Economic District,  
511356 Guangzhou, Guangdong  
**T** +86 (20) 8136 1167  
**F** +86 (20) 3222 5275  
**E** info@promat.com.cn

## Colombia

**Promat Colombia**  
Av. Kra 19 No. 120-71 Suite 506  
110111 Bogotá D.C.  
**T** +57 1 355 3500  
**F** +57 1 355 1785  
**E** info@promat.com.co

## Czech Republic

**Promat sro**  
Ckalova 22/784  
16000 Praha 6 - Bubeneč  
**T** +420 2 2439 0811  
**F** +420 2 3333 3576  
**E** promat@promatpraha.cz

## Denmark

**Promat Nordic**  
Kometvej 36, 6230 Rødskov  
**Etex Nordic A/S**  
Vendersgade 74, 3 Fredericia  
DK-7000  
**T** +45 7366 1999  
**F** +45 7466 1020  
**E** info@promat.nu

## France

**Etex France Building Performance**  
500, rue Marcel Demouque  
Zone Agroparc, CS 70088,  
84915 Avignon Cedex 9  
**T** +33 1 3979 6160  
**F** +33 1 3971 1660  
**E** info@promat.fr

## Germany

**Promat GmbH**  
Scheifenkamp 16  
40878 Ratingen  
**T** +49 2102 493 0  
**F** +49 2102 493 111  
**E** mail@promat.de

## Hong Kong

**Promat International (Asia Pacific) Ltd**  
Room 1010, C.C. Wu Building  
302-308 Hennessy Road, Wanchai  
**T** +852 2836 3692  
**E** promat.hk@etexgroup.com

## Hungary

**Promat Hungary (Division of Promat doo)**  
Pirosrozsza u. 32  
1163 Budapest  
**T** +36 1 317 5891  
**E** promat.hu@etexgroup.com

## India

**Promat Fire & Insulation Pte Ltd**  
Unit 605, 6th Floor, Tower B  
Global Business Park  
Mehrauli Gurgaon Road  
Sector 26, Gurgaon  
122002 Haryana  
**T** +91 12 4434 6865  
**E** info@promat-india.com

## Italy

**Promat SpA**  
Via Perlasca 14  
27010 Vellezzo Bellini (PV)  
**T** +39 0382 457 51  
**F** +39 0382 926 900  
**E** info@promat.it

## Japan

**Etex Japan Corporation**  
Pacific Marks Shinjuku  
4-15-7 Nishi-Shinjuku, Shinjuku-Ku  
160-0023 Tokyo  
**T** +81 3 3377 2821  
**F** +81 3 3378 2821  
**E** sales@promat.jp

## Malaysia

**Etex Malaysia Sdn Bhd (Formerly known as Promat (Malaysia) Sdn. Bhd.)**  
Unit 19-02-01, Level 2, Wisma Tune  
19 Lorong Dungun, Damansara Heights  
50490 Kuala Lumpur  
**T** +60 3 2095 8555  
**E** promat.my@etexgroup.com

## Netherlands

**Etex Building Performance B.V.**  
Oosterhorn 32-34,  
9936HD Farmsum  
**T** +31 30 241 0770  
**F** +31 30 241 0771  
**E** info@promat.nl

## Peru

**Promat Peru**  
Jr. Republica del Ecuador 448  
15079 Cercado de Lima  
**T** +51 619 6400  
**E** contacto@promat.pe

## Poland

**Promat TOP Sp zoo**  
Przeclawska 8  
03-879 Warszawa  
**T** +48 22 212 2280  
**F** +48 22 212 2290  
**E** top@promatop.pl

## Romania

**Romania Etex Building Performance S.A.**  
Vulturilor Nr. 98, 5th Floor  
030857 Bucharest  
**T** +40 31 224 01 00  
**F** +40 31 224 01 01  
**E** promat.ro@etexgroup.com

## Singapore

**Promat Building System Pte Ltd**  
10 Science Park Road, #03-14 The Alpha  
Singapore Science Park II  
117684 Singapore  
**T** +65 6776 7635  
**E** promat.sg@etexgroup.com

## Slovenia

**Promat doo**  
Kidričeva 56b  
4220 Škofja Loka  
**T** +386 4515 1451  
**F** +386 4515 1450  
**E** promat.si@etexgroup.com

## South Korea

**Promat International (Asia Pacific) Ltd (Korea Branch Office)**  
11F, Dong-a Building  
117 Namdaemun-ro, Jung-gu  
04522 Seoul  
**T** +82 70 7794 8216  
**F** +82 2 779 5566  
**E** info@promat-ap.com

## Spain

**Promat Ibérica SA**  
C/Velazquez 47, planta 6ª izquierda  
28001 Madrid  
**T** +34 91 781 1550  
**F** +34 91 575 1597  
**E** info@promat.es

## Switzerland

**Promat AG**  
Industriestrasse 3  
9542 Münchwilen  
**T** +41 52 320 94 00  
**F** +41 52 320 94 02  
**E** office@promat.ch

## UAE

**Etex Middle East LLC**  
Plot no. 597-921  
Dubai Investment Park 2  
PO Box 123945, Dubai  
**T** +971 4 885 3070  
**F** +971 4 885 3588  
**E** info@promatfp.ae

## UK

**Etex Building Performance Ltd**  
Gordano House  
Marsh Lane, Easton-in-Gordano  
BS20 ONE Bristol  
**T** +44 (0)800 373 636  
**F** +44 1275 379 037  
**E** Sales: fpsales@etexbp.co.uk  
Technical: technical.promat@etexbp.co.uk

## USA

**Promat Inc**  
1731 Fred Lawson Drive  
TN 37801 Maryville  
**T** +1 865 681 0155  
**F** +1 865 681 0016  
**E** sales@promat.us

Visit us at  
[www.promat.com](http://www.promat.com)

